

# Bella

Faux Wood Blinds



Elegant  
WINDOW FASHIONS

Reference Guide 2025

**Blind Specs and Terminology**

Overview ..... 3

Specifications ..... 4-5

Blind Terminology ..... 6

Frequently Ask questions ..... 7

**Installation**

Tools & Hardware ..... 8

Preparing for Installation ..... 9

Installation Overview .....10 -11

Detailed Installation Guide .....12-13

**Product Information**

Ordering ..... 14

Warranty ..... 15-16

## Summary


- Minimum Width.....14.75"  
Maximum Width.....84"
- Minimum Height.....30"  
Maximum Height..... 96"  
- max width 60" over 84" height
- All blinds color: Bright White
- 2" blinds available in smooth or embossed texture
- 2.5" blinds available in smooth finish only (10% Surcharge)
- Wand Control Location: Left
- Wand Length:
  - 21" wand for blind 27" wide or less
  - 25" wand for blind wider than 27"
- Factory allowance on width (+/-) 1/8"
- Factory allowance (+ 1 slat)
- Valance Returns: 7/8" (IM), 3-1/8" (OM), or Custom

## Valance Choices



2.5" Modern Arc  
Valance



3.25" Classic Crown  
Valance



3.25" Flat Modern  
Valance



## 2" Embossed Cordless Blind

**Headrail:** 1.5" x 2" wide low profile PVC headrail

**Left Wand Tilter:** Utilize the wand to operate the blinds, opening or closing them as needed.

**Cord Ladder:** polyester braided cord ladders provide maximum strength and flexibility with minimum stretch, ensuring overlap when closed.

**Bottom Rail:** reinforced rectangular, hollow PVC bottom rail with end caps

**Valance Types:** 2.5" modern arc valance

**Slats:** 2" embossed

**Color:** White EO2

**Lengths:** 36", 42", 48", 54", 60", 66", 72", 78", 84", 96"

**Cordless:** cordless design with a simple raise and lower via manual movement of the bottom rail.

## 2" & 2.5" Smooth Cordless Blind

**Headrail:** 1.5" x 2" wide low profile PVC headrail

**Wand Tilter:** Utilize the wand to operate the blinds, opening or closing them as needed.

**Slats:** 2" or 2.5" smooth slat finish

**Cord Ladder:** polyester braided cord ladders provide maximum strength and flexibility with minimum stretch, ensuring overlap when closed.

**Bottom Rail:** reinforced rectangular, hollow PVC bottom rail with end caps

**Valance Types:** 2.5" modern arc, 3.25" flat modern, 3.25" classic crown (hollow)

**Color:** White EO2


**Lengths:** 36", 42", 48", 54", 60", 66", 72", 78", 84", 96"

**Cordless:** cordless design with a simple raise and lower via manual movement of the bottom rail.


## Measuring for Blinds

Installing blinds correctly depends on measuring windows well. The first step to measuring windows well is to decide whether you want to purchase Outside or Inside Mount Blinds, as this will affect your measurements.

Outside Mount

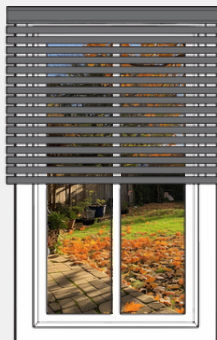



Inside Mount

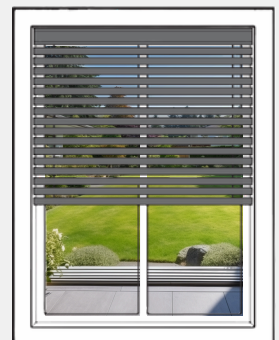

## Proprietary cordless module design

The variable tension spring effectively secures the blind in place at key positions, such as the top or bottom, during operation. Its design, though simple, ensures durability by minimizing the number of moving components, thus enhancing longevity.

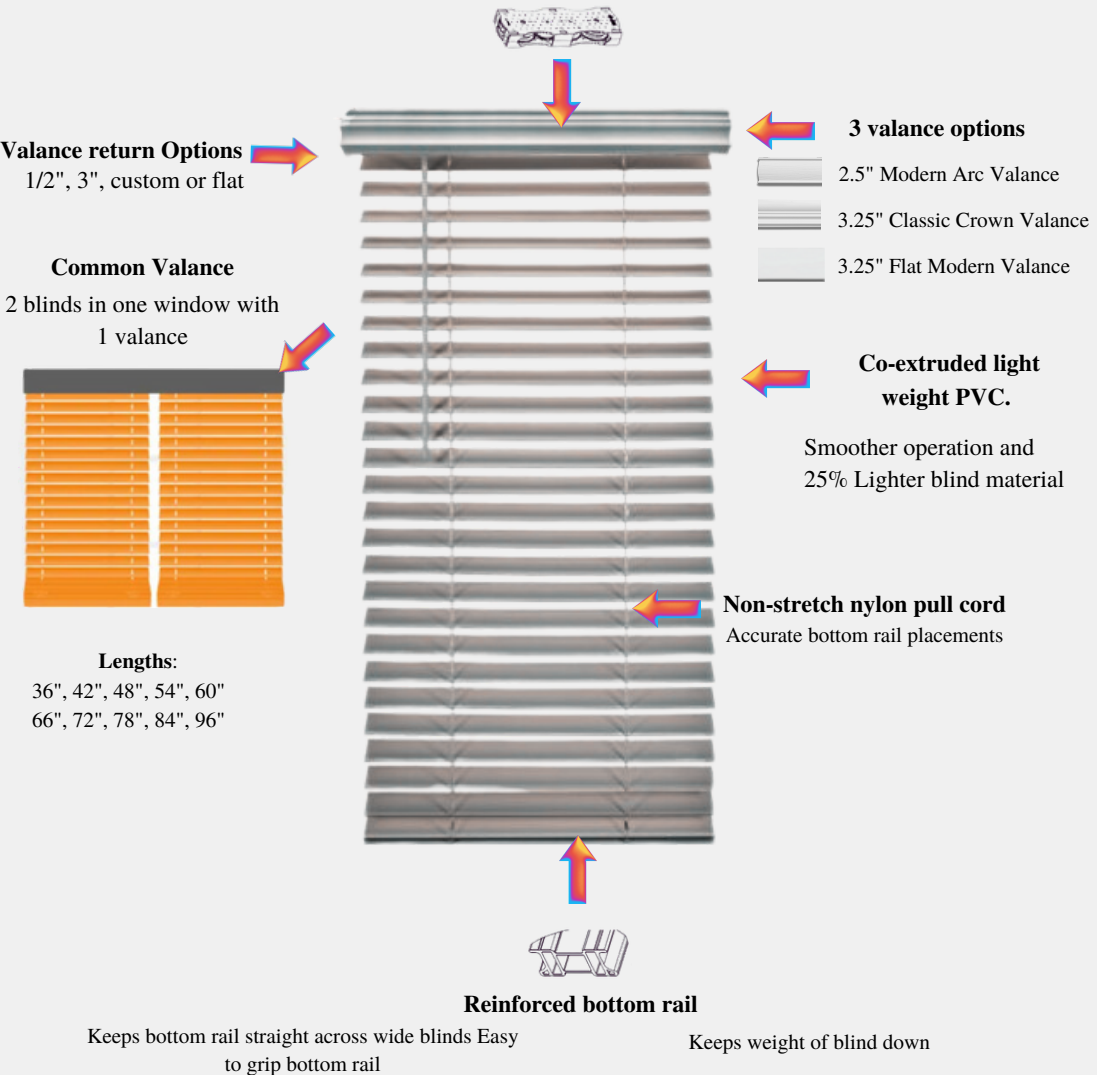

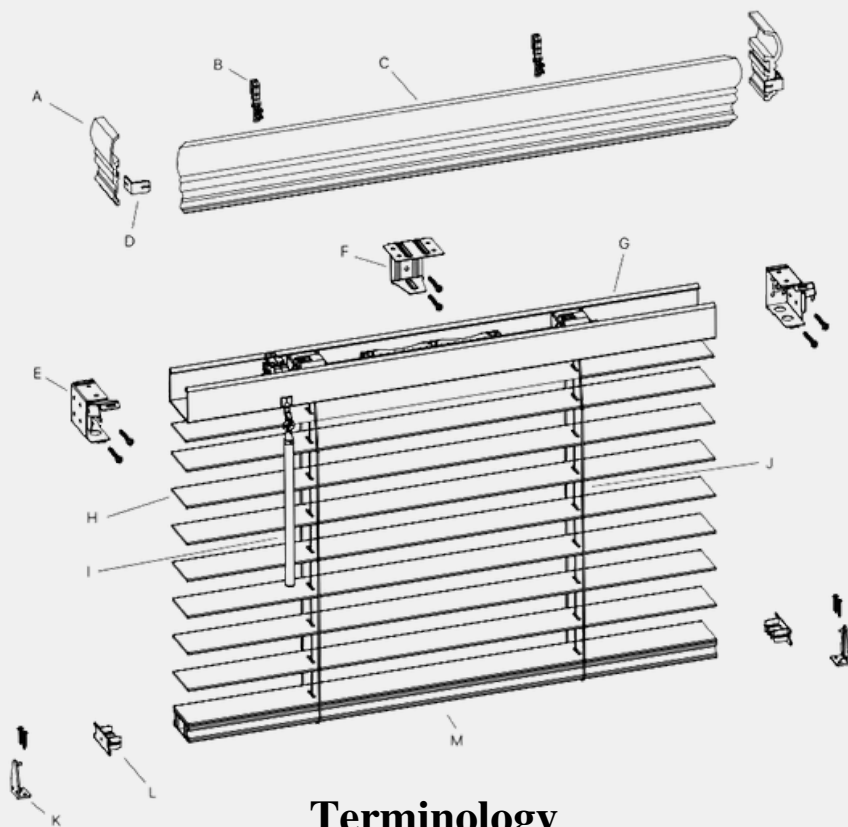

## Terminology

A. Valance returns

B. Valance Clips

C. Valance

D. Valance Return Clip

E. Install Bracket

F. Center Support Bracket

G. Head Rail

H. Slat

I. Tilt Wand

J. Ladder

K. Holddown Bracket

L. Bottom Rail End Cap

M. Bottom Rail

## 1) At what size is the center support bracket necessary?

Blind Width	Center Support Bracket
$x < 25''$	0
$25'' < x < 40''$	1
$40'' < x < 50''$	2
$50'' < x < 60''$	2
$60'' < x < 73''$	2

## 2) What are the minimum height and width?

14.75x30

## 3) What are the minimum depth and flush depth?

Min. depth is 1.5"

Standard depth is 2.5"

## 4) What is your stacking chart?

Length	2" FW	2.5" FW
36"	5	4.5
42"	5.5	5
48"	6	5.5
54"	6.5	6
60"	7	6.5
66"	7.5	7
72"	8	7.5
78"	8.5	8
84"	9	8.5
96"	10	9.5

## 5) What material are your head and bottom rails made of?

- PVC

## 6) What material are your slats made of?

- Coextruded PVC

## 7) What material are your ladder and wand made of?

- The ladder is made of non-stretch polyester, and the wand is made of PVC


## 8) What is your product's country of origin?

- Cambodia

## Equipment Required

For 2-inch and 2 1/2-inch Faux Wood Cordless Blinds


### Tools Required




Electric  
Drill




Ladder




Phillips  
Screwdriver



Level




Pencil




Measuring  
Tape

### Hardware


Unpack the hardware and make sure you have all the necessary pieces for installation



Bracket




Screws




Center support  
bracket



Hold-Down  
Brackets

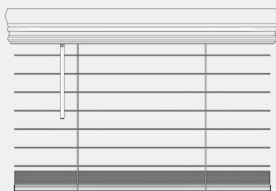

Blind



Wand




## BEFORE YOU BEGIN!



- Confirm the blind for proper width and length
- If installing several sets of blinds, be sure to match them with the appropriate window
- Check the installation surface to ensure you have suitable fasteners and tools
- Lay out and organize all parts and components
- Your order will include the correct number of installation brackets for your blinds




**First**, measure the width of the window at three different points; namely, the top, middle, and bottom, and record the measurement with the smallest value.

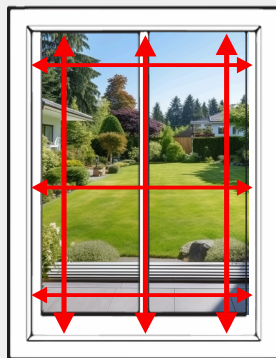

**Please follow these steps for optimal installation.** Remember to unpack the blinds and mounting hardware with care and thoroughly acquaint yourself with the contents of the package, ensuring all installation hardware is present before you begin.

1. Begin by positioning the mounting brackets flush and level with the window frame. Use a pencil to mark the screw holes, setting the brackets further into the opening to accommodate the decorative valance if provided. We recommend marking diagonal holes for a more secure installation. Create starter holes for the screws by using a hammer or drill bit to facilitate fastening.
2. Insert two screws to secure the first bracket and repeat the process on the opposite side of the window. Once both brackets are straight and aligned, fasten and tighten the screws.
3. Install any center support brackets that came with the blinds. Ensure alignment accuracy by using a level tool or steel measuring tape. Be mindful of the center support brackets; position them off-center to avoid interference with internal mechanisms.
4. Attach the valance clips, included in the package, securely onto the headrail. Remember to space them evenly to prevent obstruction of the internal mechanisms.
5. Slide the headrail into the brackets. Close the bracket covers by pressing up on the bottom of the bracket with your thumbs while lowering the front part of the bracket until they snap into place.
6. Snap the valance into your valance clips.
7. Test your new blinds. Raise and lower them using the pull cord and tilt the slats by adjusting the tilt cord or rotating the wand.

**Begin** by measuring the width of the window, which can be achieved by measuring the distance between the left and right edges of the window frame. The height of the window can then be determined by measuring from the top of the window frame to the windowsill. To ensure optimal privacy and light control, it is recommended that an additional 4 inches be added to both the height and width measurements.

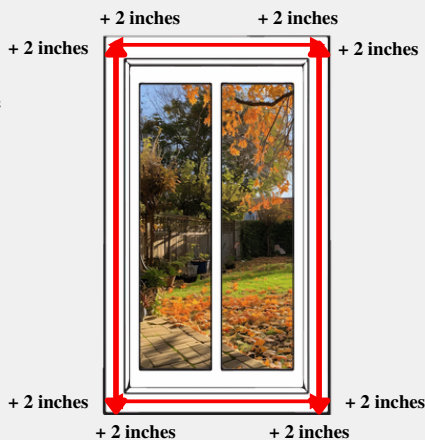


**Please follow these steps for optimal installation.** Remember to unpack the blinds and mounting hardware with care and thoroughly acquaint yourself with the contents of the package, ensuring all installation hardware is present before you begin.

1. Begin by positioning your blind on the wall surface or window trim. Use a pencil to mark the left and right outside edges along the bottom and sides, ensuring that the blind is centered and level.
2. Align the side and bottom of your first mounting bracket along the inside of your pencil mark, and mark the holes. Pre-drill and insert screws. If you are mounting into drywall with no studs behind, use drywall anchors. Repeat this process for the opposite mounting bracket.
3. If you have a center support bracket, install it slightly off-center above a section of the headrail so that it will not interfere with the operation of the blind cord.
4. Snap the included valance clips over the headrail, spacing them evenly to avoid interfering with any mechanisms inside the blinds.
5. Slide the headrail into the brackets. Close the bracket covers by pressing up on the bottom of the bracket with your thumbs while lowering the front part of the bracket until they snap into place.
6. Attach the side returns of your valance using the supplied L-brackets. Snap your valance into the pre-installed clips.
7. Test your new blinds. Use the pull cord to slowly raise and lower your blinds, and tilt your slats by either adjusting the tilt cord or rotating the wand.


## FOR BOTH INSIDE & OUTSIDE MOUNT

Center Support Brackets (if included)

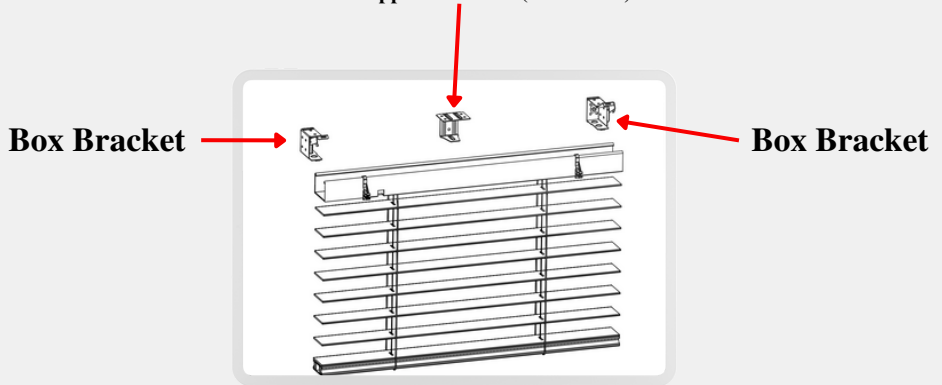


## Installing Center Support Brackets (if included)

### Inside Mount

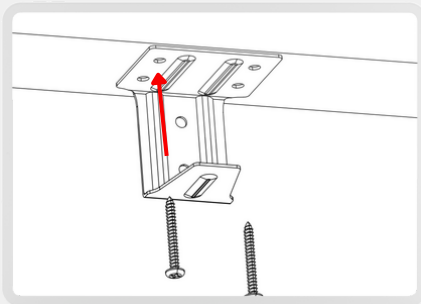


### Outside Mount

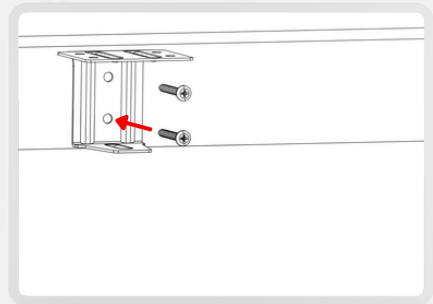


## Installing Box Brackets

### Inside Mount

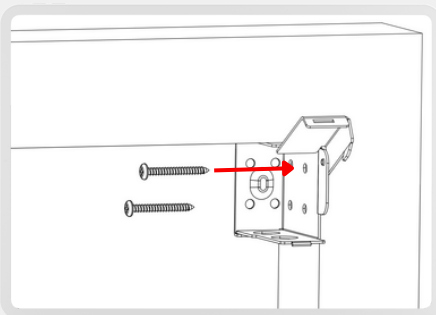

### Outside Mount

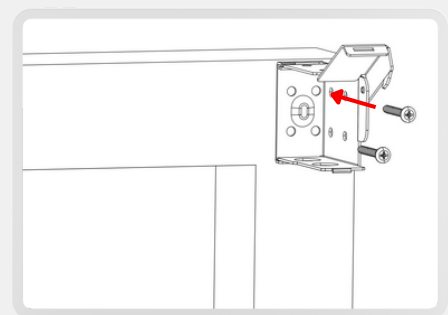


## INSTALLING ADDITIONAL COMPONENTS


### Hold-Down Brackets (optional)

- Hold-down brackets are essential for door applications, preventing blinds from swaying. Assemble them as indicated on each side of the bottom rail.

#### Inside Mount

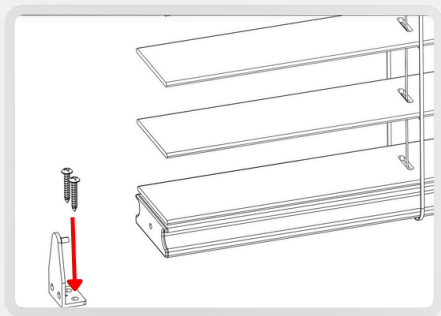


#### Outside Mount

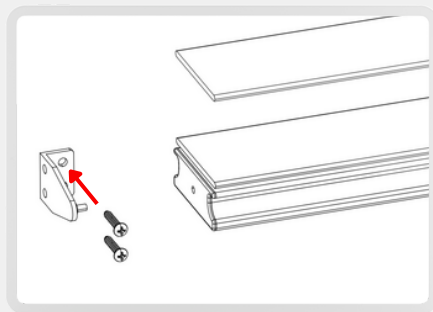

#### Tilt Wand

- Engage the tilt mechanism by pulling down the sleeve, then secure the end of the wand onto the tilt.

#### Tilt Mechanism

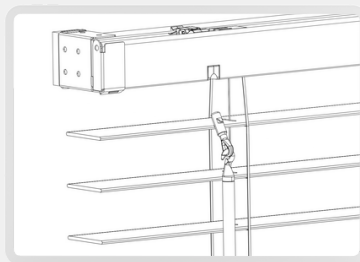

#### Tilt Wand

## INITIAL ORDER SETUP

1. To place an order, once logged into your account, you will see the “Add New Quote” button in the middle-left side of the screen, click on it to bring up the start page for the ordering process.
2. You will see that all your information will be filled in automatically for the Ship-To Tab.
3. On the Start Tab, You will need to fill in a Sidemark, and then a Client PO if you do not want to use the defaulted PO shown to continue with the order.
4. If you have any comments, they can be entered in the General Comments Box.
5. Once all information is entered, click the Next button to continue. An order can be canceled at any time by hitting the Void or Cancel buttons.
6. **Group:** Bella Faux Wood Blinds
7. **Product:** Limited Custom Faux Wood Blind
8. **Model:** Choose your blind’s slat size wanted
9. Enter your quantity, color, width & height wanted.
10. Select which Mount, Valance, & Returns are wanted.
11. Can also select if want to Rush as well.
12. Click the “OK Item” button to save the line item & continue.
13. When finished entering all items, click the “Summary” Button.
14. Once order finalized and ready to go, you click the “Submit To Fabricator” button to place the order.

Note: You also have the option at this time to save the order as a Quote, Sales Order, Go Back to the Summary, or Void the order by clicking the appropriate buttons.

This warranty is provided to you by Elegant Window Fashions LLC. This warranty applies only to Elegant Window Fashions products that meet the following conditions:

- (1) You are the original purchaser of the product;
- (2) The product was properly installed in a residential dwelling; and
- (3) The product was made or assembled exclusively from Elegant Window Fashions' materials and components.

## **WARRANTY:**

Elegant Window Fashions warrants the product against original defects in materials or workmanship for as long as you own the product. Our sole obligation under the warranty is to repair or replace defective products or components without charge. Elegant Window Fashions is not responsible for transportation costs to or from the retailer or costs for measuring and installing the products. If repairs are made under this warranty, the repairs will be made with like or similar parts. Conditions or damages caused by accidents, alterations, misuse, or failure to follow instructions for measurement, installation, cleaning, or maintenance are excluded from the warranty. In addition, normal wear and tear are not covered by the warranty. All cords eventually wear out.

Bella  
Faux Wood Blinds

## Commercial/Contract Orders have a 1-Year Limited Lifetime Warranty.

This commercial warranty is exclusive and in lieu of all other obligations, liabilities, or warranties. All other warranties, both expressed and implied, are explicitly disclaimed. In no event shall Elegant Window Fashions be liable or responsible for incidental or consequential damages or for any other direct or indirect damage, loss, cost, expense, or fee.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so this limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

**SERVICE:** If you believe a product is defective, please return the product with your original sales receipt to the retail store at which you purchased the product. This store will arrange for inspection of the product and repair or replacement, if warranted, by a licensed fabricator or Elegant Window Fashions. If you need further assistance regarding this warranty, you may write or call Elegant Window Fashions at the telephone number provided below.





For assistance with warranty claims, please contact the original dealer. Should you require product manuals or technical support, we invite you to visit <https://elegantwf.com/contact-us/> or call 888-615-0642.

We would like to bring to your attention that repair or replacement of defective items is the sole remedy under this warranty. Repairs shall be executed using comparable or identical parts, and shipping charges are not included in this warranty. Warranty claims must be accompanied by documented proof of purchase, as well as specific details regarding the nature of the problem and the product's location.

This warranty is exclusive and supersedes all other obligations, liabilities, or warranties. All other warranties, whether expressed or implied, are explicitly disclaimed. Elegant Windows or Elegant distributors/dealers shall not be liable for incidental or consequential damages, nor any other direct or indirect damage, loss, cost, expense, or fee. Please note that products are not covered for damage resulting from natural disasters or "Acts of God."

We would like to draw your attention to the fact that some states do not allow the exclusion or limitation of implied warranties, or incidental or consequential damages. As a result, the above limitation may not apply to your state.

**For further information contact:**

Elegant Window Fashions  
802 Avenue R  
Grand Prairie, TX 75050  
817-633-4005